

Contents of the Revit package


NOTE:

In order to facilitate the designer, the system was placed in the "Roof" family and also in the "Floor" family.



In order to design correctly the systems, it is necessary to respect the intended uses and the indications given in the Polyglass technical documentation.

If you have any question, please contact Polyglass Technical Support

Exploded Axonometric

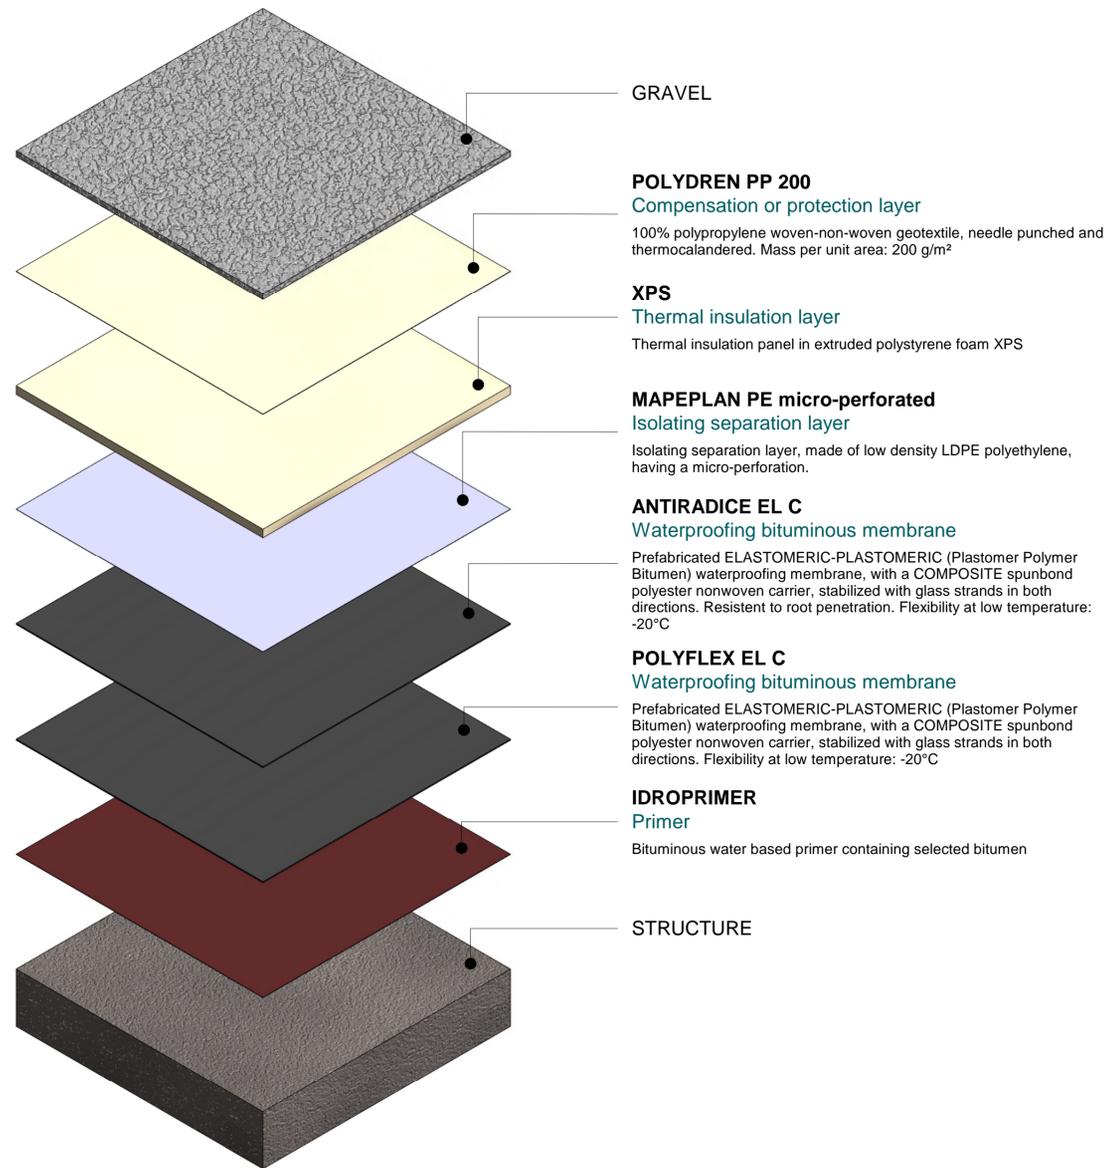

System description

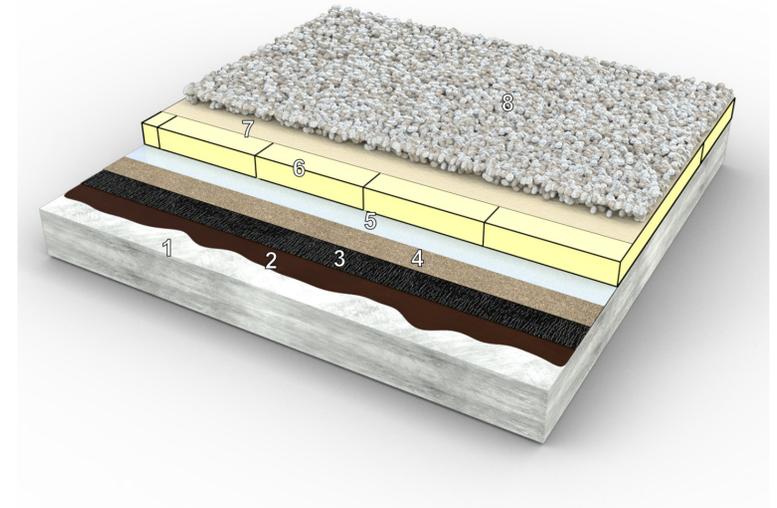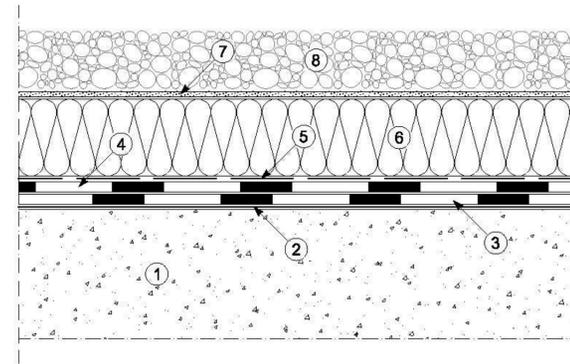

BIM System B07 01 Roof with gravel protection and inverted thermal insulation					
n.	LAYER	MATERIAL	THICKNESS (mm)	POSSIBLE ALTERNATIVE *	NOTE
1	Structure	Reinforced concrete slab	-	Concrete and masonry slab, precast concrete elements, corrugated metal sheet with concrete slab	The supports must be made on a slope or with an overlying slope screed in non-lightweight concrete
2	Primer **	IDROPRIMER	0,1		
3	Waterproofing membrane first layer	POLYFLEX EL C	4		
4	Waterproofing membrane second layer	ANTIRADICE EL C	4		
5	Separation layer **	MAPEPLAN PE micro-perforated	0,1		
6	Thermal insulation layer	Extruded polystyrene foam XPS	-		
7	Protection layer	POLYDREN PP 500	2,7		
8	Ballast layer	Gravel	-		Distribution over the entire surface with a uniformly distributed load of at least 75 kg/m ²

*NOTE:
The alternative products are inserted in the library file "MaterialsPolyglass_ENG.adsklib"

**NOTE:
In the build-up made with Autodesk Revit software, the minimum thickness that can be depicted is 0.8 mm, so all products with a lower thickness will be represented with this value.

For the characteristics and methods of use of all products, always refer to the latest updated version of the technical data sheets available on the website www.polyglass.com

BIM System B07|01

Roof with gravel protection and inverted thermal insulation

NOTE: it is under user's responsibility to verify the correctness of the final values provided by Revit for the compound package and that, in any case, Polyglass can guarantee the correspondence of the information provided, only in relation to the products of its own manufacture.



Registered office: Viale E. Jenner, 4 20159 Milano
Head Office: Via Giorgio Squinzi, 2 31047 Ponte di Piave (TV)
tel. +39 04227547 - fax +39 0422854118
www.polyglass.com e-mail: info@polyglass.it