



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804:2012+A2:2019/AC:2021 for:

Evolight S P - Bitulight P Polyflex Light P - Antiradice Light P

Programme:	The International EPD® System; www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-08546
Publication date:	2023-03-23
Valid until:	2028-03-22
Geographical scope:	International

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com.

1. COMPANY DESCRIPTION / GOAL & SCOPE

The Company's headquarter is located in Ponte di Piave, Treviso (Italy). Over 90.000 m² of surface, 25.000 m² covered, 4 production lines of polymer-bitumen membranes and three production lines of synthetic PVC-P and TPO/FPO membranes.

In October 2008 Polyglass was taken over by the MAPEI Group, an international Company in the chemical industry for construction, with 86 production plants in 5 continents, in 36 countries.

Polyglass SpA is ISO 14001 certified since 2010, ISO 9001 since 1995 and since 2022 has obtained the ISO 45001:2018 too.

The goal of the study is to provide necessary data and documentation to produce an EPD according to the requirements of PCR Environdec (version 1.11, 2021-02-05) under EN 15804:2012+A2:2019/AC:2021 and to have more comprehension about the environmental impacts related to **Evolight S P**, **Bitulight P**, **Polyflex Light P** and **Antiradice Light P** manufactured in Polyglass SpA located in Ponte di Piave (TV-Italy), including packaging of the finished products.

Target audiences of the study are customers and other parties with an interest in the environmental impacts of **Evolight S P**, **Bitulight P**, **Polyflex Light P** and **Antiradice Light P**.

This analysis shall not support comparative assertions intended to be disclosed to the public.



Figure 1: Polyglass S.p.A. head quarter

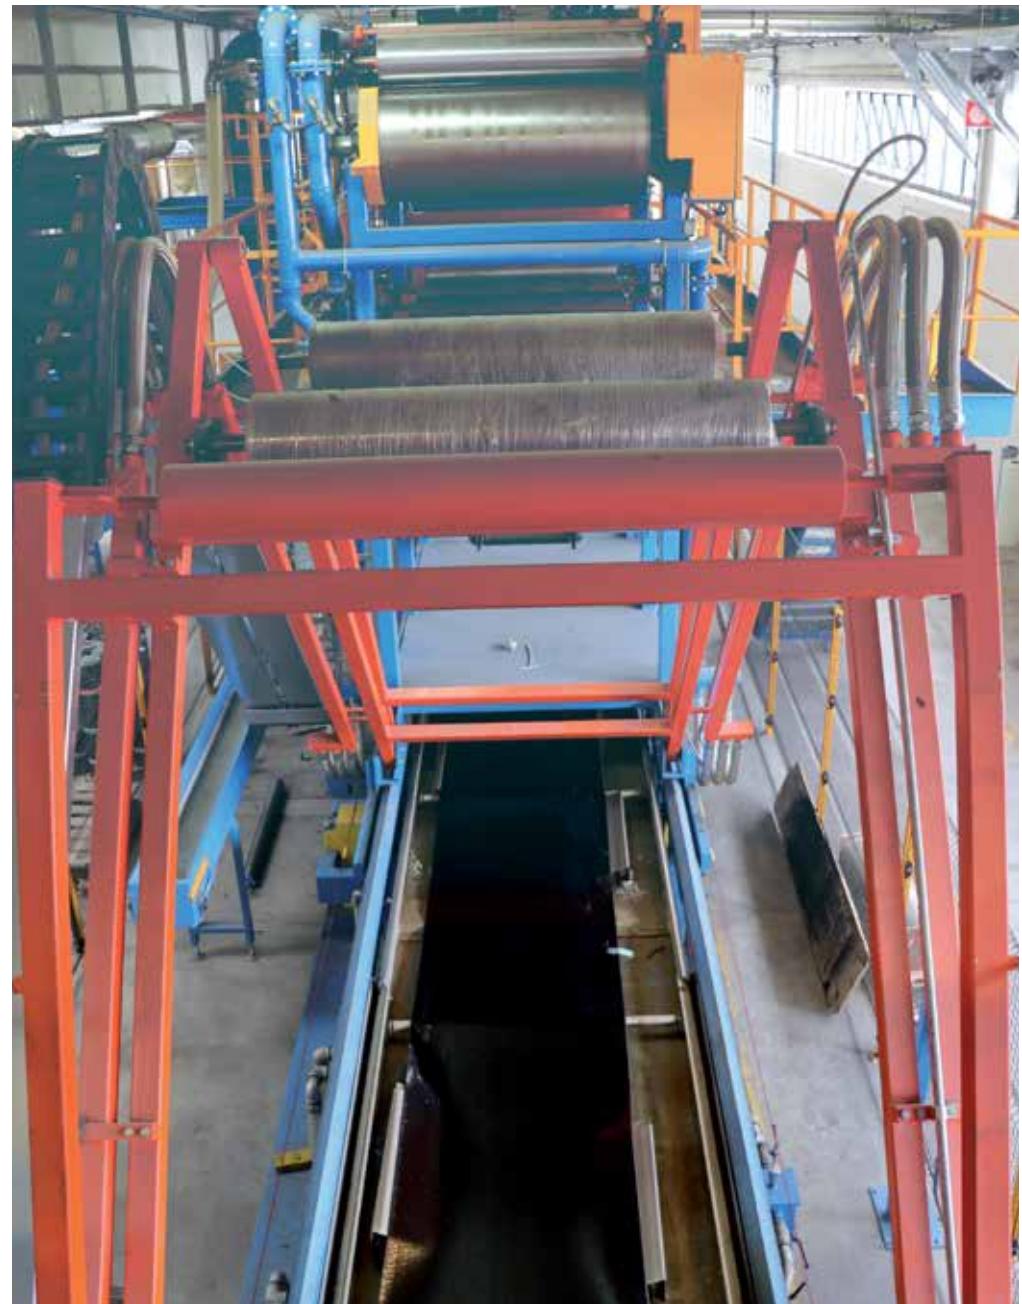


Figure 2: Production equipment

2. PRODUCT DESCRIPTION

Evolight S P, Bitulight P, Polyflex Light P and Antiradice Light P are prefabricated elastomeric-plastomeric membranes offering good performance, by virtue of a higher percentage of polymers. Their special formulation, comprising the exclusive REOXTHENE® Ultralight Technology compound also results in a unique weight-to-thickness ratio of their kind.

Evolight S P, Bitulight P, Polyflex Light P and Antiradice Light P are compliant with European legislation and it is sold with different packaging, as follow:

- Pallet: 23 rolls per pallet in average
- Length of rolls: 10 m
- Width of rolls: 1 m



Figure 3: Polyflex Light Evolution P

3. CONTENT DECLARATION

The main components and ancillary materials of Evolight S P, Bitulight P, Polyflex Light P and Antiradice Light P are the following.

Table 1: Composition

Materials	Percentage (%)
Bitumen	50 - 70
Polymers	10 - 20 (10% recycled pre-consumer)
Filler	10 - 20
Reinforcing material	0 - 5 (4% recycled)
Other additives	0 - 2
Packaging Materials	Percentage (%)
Wood	< 2,5
Plastic	< 0,5

The product does not contain a concentration higher than 0,1% (by unit weight) of either carcinogenic substances or substances of very high concern (SVHC) on the REACH Candidate List published by the European Chemicals Agency.

4. DECLARED UNIT AND REFERENCE SERVICE LIFE

The declared unit is 1m² of packaged finished product having a 4 mm thickness (average areic mass: 3,83 kg/m²).

Packaging materials include:

- Wooden pallet
- LDPE and PPL used as wrapping material

5. SYSTEM BOUNDARIES & ADDITIONAL TECHNICAL INFORMATION

The approach is "cradle to gate" (A1-A3) with modules C1-C4 and module D and optional modules (A4 - A5):

- A1 - A3 (Product stage): extraction and transport of raw materials, packaging included, production process
- A4 - A5 (Construction process stage): transport of the finished product to final customers and installation into the building with incineration of the packaging material.
- C1 - C4 (End of life stage): collection rate of 100% as C&D waste considering an end of waste scenario with recycling, incineration and disposal.
- D (Resource recovery stage): benefits and loads of energy recovery and recycling of installation and demolition wastes are considered.

Table 2: System boundaries

	Product stage				Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
Modules declared	X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X	
Geography	EU, IT	EU, IT	IT	EU	EU	-	-	-	-	-	-	-	EU, IT	EU, IT	EU	EU	EU	
Specific data	> 90%					-	-	-	-	-	-	-	-	-	-	-	-	
Variation - products	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	
Variation - sites	Not-relevant					-	-	-	-	-	-	-	-	-	-	-	-	

A brief description of production process is the following:

The bituminous membrane production is an impregnation process with an internal carrier (reinforcement) made of fiberglass or non-woven polyester. Raw materials such as bitumen, resins, filler and other additives are first put inside a primary mixer where polymers and additives are melted at 200 °C with bitumen and filler. After blending for 4/5 hours, the compound is pumped into a secondary mixer that has the aim to fulfil the impregnation vat, where the carrier will be impregnated before calendaring. Then the membrane is cooled in a water-cooling apparatus and at the end of the process, the product is wound into rolls and palletized.

Table 3: Transport to the building site (A4) per DU (declared unit)

Scenario information	Value	Unit
Means of transport: truck euro 6 with 27 tons of payload & ship with a 27500 DWT		
Litres of fuel (diesel for truck)	0,002	l/100km
Litres for fuel (HFO for ship)	0,0004	l/100km
Transport distance - truck	1300	km
Transport distance - ship	500	km
Capacity utilisation (including empty runs) - truck	61	%
Capacity utilisation (including empty returns) - ship	48	%

Scenario information	Value	Unit
Gross density of products transported	~ 1200	kg/m ³
Capacity utilisation volume factor	1	-

Table 4: Installation into the building (A5) per DU

Scenario information	Value	Unit
Ancillary materials for installation	0	kg
Water use	0	m ³
Other resources use (propane)	0,1125	kg/m ²
Electricity and other energy consumption for the installation	0	kWh
Waste materials on building site before waste processing, generated by the product's installation (specified by type)	0,00139 (paper) 0,000157 (PP) 0,0248 (wood)	kg
Output materials (specified by type) as result of waste processing at the building site e.g. of collection for recycling, for energy recovery, disposal (specified by route)	0,0263 (incineration)	kg
Direct emission to ambient air, soil and water	0	kg

Table 5: End of Life (C1-C4) per DU

Scenario information	Value	Unit
Collected separately	0	kg
Collected with mixed construction waste	1	kg
Reuse	0	kg
Recycling	0,146	kg
Energy recovery	0,388	kg
Landfill	0,437	kg
Transport to recycling	300	km
Transport to energy recovery	100	km
Transport to landfill	50	km

6. CUT-OFF RULES & ALLOCATION

Criteria for the exclusion of inputs and outputs (cut-off rules) in the LCA, information modules and any additional information are intended to support an efficient calculation procedure. They are not applied in order to hide data.

The following procedure is followed for the exclusion of inputs and outputs:

- All inputs and outputs to a unit process, for which data are available, are included in the calculation.
- Less than 1% of the total mass inputs/outputs of the unit process A3, are cut off (see Table 6).

Input flows are covered for the whole formula.

Table 6: Cut-off criteria

Process excluded from study	Cut-off criteria	Quantified contribution from process
A3: production (auxiliary materials)	Less than 10,4 kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%
A3: production (particle emissions to air)	Less than 10,4 kg/kg of finished product	Sensitivity study demonstrates a relative contribution lower than 0,5%

For the allocation procedure and principles, consider the following table (Table 7).

Table 7: Allocation procedure and principles

Module	Allocation Principle
A1	All data are referred to 1m ² of product - A1: electricity is allocated to the reference production line
A3	All data are referred to 1m ² of packaged product. - A3-wastes: the data are allocated to the whole plant production and to the reference production line



7. ENVIRONMENTAL PERFORMANCE AND INTERPRETATION

The following tables show the environmental impacts for the products considered according to the requirements of EN15804:2012+A2:2019/AC:2021. The results are referred to the declared unit (see § 4). The additional environmental indicators are not declared.

EVOLIGHT S P (1 m² of product packaged)

Table 8: Evolight S P - Potential environmental impact. mandatory indicators according to en 15804 referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,23E+00	3,27E-01	5,08E-01	0,00E+00	1,24E-02	1,86E+00	2,43E-02	-7,04E-01
GWP_{FOSSIL}	(kg CO ₂ eq.)	2,27E+00	3,25E-01	4,79E-01	0,00E+00	1,23E-02	1,83E+00	2,42E-02	-7,02E-01
GWP_{BIOGENIC}	(kg CO ₂ eq.)	-4,43E-02	2,89E-04	2,90E-02	0,00E+00	1,21E-05	2,23E-02	2,19E-05	-1,21E-03
GWP_{LULUC}	(kg CO ₂ eq.)	8,81E-04	2,01E-03	9,12E-05	0,00E+00	8,67E-05	6,94E-05	4,47E-05	-6,99E-05
ODP	(kg CFC 11 eq.)	1,53E-08	3,08E-14	2,61E-08	0,00E+00	1,26E-15	3,16E-13	5,69E-14	-3,08E-12
AP	(mol H+ eq.)	8,04E-03	2,00E-03	9,03E-04	0,00E+00	4,00E-05	9,98E-04	1,72E-04	-1,29E-03
EP_{FRESHWATER}	(kg P eq.)	9,36E-05	1,07E-06	2,61E-05	0,00E+00	4,59E-08	1,99E-07	4,11E-08	-8,44E-07
EP_{MARINE}	(kg N eq.)	2,47E-03	7,11E-04	2,68E-04	0,00E+00	1,81E-05	3,92E-04	4,39E-05	-3,05E-04
EP_{TERRESTRIAL}	(mol N eq.)	2,16E-02	7,90E-03	2,90E-03	0,00E+00	2,03E-04	4,46E-03	4,82E-04	-3,31E-03
POCP	(kg NMVOC eq.)	6,68E-03	1,61E-03	9,70E-04	0,00E+00	3,58E-05	1,03E-03	1,33E-04	-1,13E-03
ADP_{MINERALS&METALS*}	(kg Sb eq.)	4,75E-06	3,10E-08	1,24E-06	0,00E+00	1,30E-09	1,81E-08	2,48E-09	-1,36E-07
ADP_{FOSSIL*}	(MJ)	1,49E+02	4,23E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,17E-01	-3,05E+01
WDP*	(m ³ world eq.)	4,59E-01	3,38E-03	3,34E-02	0,00E+00	1,44E-04	2,30E-01	2,66E-03	-4,99E-02

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experienced with the indicator.

Table 9: Evolight S P - Potential environmental impact - additional mandatory and voluntary indicators referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,13E+00	3,21E-01	4,70E-01	0,00E+00	1,21E-02	1,83E+00	2,39E-02	-6,79E-01

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 10: Evolight S P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	6,24E+00	2,72E-01	8,52E-02	0,00E+00	1,17E-02	1,94E-01	4,76E-02	-2,14E+00
PERM	MJ	1,75E+00	0,00E+00						
PERT	MJ	8,00E+00	2,72E-01	8,52E-02	0,00E+00	1,17E-02	1,94E-01	4,76E-02	-2,14E+00
PENRE	MJ	1,49E+02	4,24E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,18E-01	-3,06E+01
PENRM	MJ	2,65E-01	0,00E+00						
PENRT	MJ	1,49E+02	4,24E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,18E-01	-3,06E+01
SM*	kg	5,34E-01	0,00E+00						
RSF	MJ	0,00E+00							

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
NRSF	MJ	0,00E+00							
FW	m ³	1,15E-02	3,15E-04	7,83E-04	0,00E+00	1,35E-05	5,43E-03	8,06E-05	-2,11E-03

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

*Referred only to 1 m² of product without packaging.

Table 11: Evolight S P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	2,82E-05	2,21E-11	5,62E-12	0,00E+00	8,97E-13	8,51E-11	1,63E-11	-1,25E-09
NHWD	kg	1,07E-01	6,70E-04	1,69E-02	0,00E+00	2,76E-05	2,49E-01	1,62E+00	-6,06E-03
RWD	kg	5,51E-04	7,65E-06	2,55E-06	0,00E+00	3,15E-07	4,00E-05	3,54E-06	-6,14E-04
Components for re-use	kg	0,00E+00							
Materials for recycling	kg	4,09E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,41E-01	0,00E+00	-5,41E-01
Materials for energy recovery	kg	0,00E+00							
Exported energy, electricity	MJ	0,00E+00	0,00E+00	1,38E-01	0,00E+00	0,00E+00	2,03E+00	0,00E+00	-2,16E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	2,58E-01	0,00E+00	0,00E+00	3,80E+00	0,00E+00	-4,06E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed.

Table 12: Evolight S P - Information on biogenic carbon content at the factory gate referred to 1 m² of packaged finished product

Indicator	Unit	Quantity
Biogenic carbon content in packaging	kg C	3,96E-02
Biogenic carbon content in product	kg C	0,00E+00

BITULIGHT P (1 m² of product packaged)

Table 13: Bitulight P - Potential environmental impact. mandatory indicators according to en 15804 referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,23E+00	3,27E-01	5,08E-01	0,00E+00	1,24E-02	1,86E+00	2,43E-02	-7,04E-01
GWP_{FOSIL}	(kg CO ₂ eq.)	2,27E+00	3,25E-01	4,79E-01	0,00E+00	1,23E-02	1,83E+00	2,42E-02	-7,02E-01
GWP_{BIOGENIC}	(kg CO ₂ eq.)	-4,43E-02	2,89E-04	2,90E-02	0,00E+00	1,21E-05	2,23E-02	2,19E-05	-1,21E-03
GWP_{LULUC}	(kg CO ₂ eq.)	8,81E-04	2,01E-03	9,12E-05	0,00E+00	8,67E-05	6,94E-05	4,47E-05	-6,99E-05
ODP	(kg CFC 11 eq.)	1,53E-08	3,08E-14	2,61E-08	0,00E+00	1,26E-15	3,16E-13	5,69E-14	-3,08E-12
AP	(mol H+ eq.)	8,04E-03	2,00E-03	9,03E-04	0,00E+00	4,00E-05	9,98E-04	1,72E-04	-1,29E-03
EP_{FRESHWATER}	(kg P eq.)	9,36E-05	1,07E-06	2,61E-05	0,00E+00	4,59E-08	1,99E-07	4,11E-08	-8,44E-07
EP_{MARINE}	(kg N eq.)	2,47E-03	7,11E-04	2,68E-04	0,00E+00	1,81E-05	3,92E-04	4,39E-05	-3,05E-04
EP_{TERRESTRIAL}	(mol N eq.)	2,16E-02	7,90E-03	2,90E-03	0,00E+00	2,03E-04	4,46E-03	4,82E-04	-3,31E-03
POCP	(kg NMVOC eq.)	6,68E-03	1,61E-03	9,70E-04	0,00E+00	3,58E-05	1,03E-03	1,33E-04	-1,13E-03
ADP_{MINERALS&METALS*}	(kg Sb eq.)	4,75E-06	3,10E-08	1,24E-06	0,00E+00	1,30E-09	1,81E-08	2,48E-09	-1,36E-07

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
ADP _{FOSSIL*}	(MJ)	1,49E+02	4,23E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,17E-01	-3,05E+01
WDP*	(m ³ world eq.)	4,59E-01	3,38E-03	3,34E-02	0,00E+00	1,44E-04	2,30E-01	2,66E-03	-4,99E-02

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experienced with the indicator.

Table 14: Bitulight P - Potential environmental impact - additional mandatory and voluntary indicators referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,13E+00	3,21E-01	4,70E-01	0,00E+00	1,21E-02	1,83E+00	2,39E-02	-6,79E-01

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 15: Bitulight P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	6,24E+00	2,72E-01	8,52E-02	0,00E+00	1,17E-02	1,94E-01	4,76E-02	-2,14E+00
PERM	MJ	1,75E+00	0,00E+00						
PERT	MJ	8,00E+00	2,72E-01	8,52E-02	0,00E+00	1,17E-02	1,94E-01	4,76E-02	-2,14E+00
PENRE	MJ	1,49E+02	4,24E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,18E-01	-3,06E+01
PENRM	MJ	2,65E-01	0,00E+00						
PENRT	MJ	1,49E+02	4,24E+00	4,09E+00	0,00E+00	1,69E-01	1,03E+00	3,18E-01	-3,06E+01
SM*	kg	5,34E-01	0,00E+00						
RSF	MJ	0,00E+00							
NRSF	MJ	0,00E+00							
FW	m ³	1,15E-02	3,15E-04	7,83E-04	0,00E+00	1,35E-05	5,43E-03	8,06E-05	-2,11E-03

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM**: Use of renewable primary energy resources used as raw materials; **PERT**: Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE**: Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM**: Use of non-renewable primary energy resources used as raw materials; **PENRT**: Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM**: Use of secondary material; **RSF**: Use of renewable secondary fuels; **NRSF**: Use of non-renewable secondary fuels; **FW**: Net use of fresh water.

*Referred only to 1 m² of product without packaging.

Table 16: Bitulight P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	2,82E-05	2,21E-11	5,62E-12	0,00E+00	8,97E-13	8,51E-11	1,63E-11	-1,25E-09
NHWD	kg	1,07E-01	6,70E-04	1,69E-02	0,00E+00	2,76E-05	2,49E-01	1,62E+00	-6,06E-03
RWD	kg	5,51E-04	7,65E-06	2,55E-06	0,00E+00	3,15E-07	4,00E-05	3,54E-06	-6,14E-04
Components for re-use	kg	0,00E+00							
Materials for recycling	kg	4,09E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,41E-01	0,00E+00	-5,41E-01
Materials for energy recovery	kg	0,00E+00							
Exported energy, electricity	MJ	0,00E+00	0,00E+00	1,38E-01	0,00E+00	0,00E+00	2,03E+00	0,00E+00	-2,16E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	2,58E-01	0,00E+00	0,00E+00	3,80E+00	0,00E+00	-4,06E+00

HWD: Hazardous waste disposed; **NHWD**: Non-Hazardous waste disposed; **RWD**: Radioactive waste disposed.

Table 17: Bitulight P - Information on biogenic carbon content at the factory gate referred to 1 m² of packaged finished product

Indicator	Unit	Quantity
Biogenic carbon content in packaging	kg C	3,96E-02
Biogenic carbon content in product	kg C	0,00E+00

POLYFLEX LIGHT P (1 m² of product packaged)

Table 18: Polyflex Light P - Potential environmental impact. mandatory indicators according to en 15804 referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP_{TOTAL}	(kg CO ₂ eq.)	2,24E+00	3,48E-01	5,39E-01	0,00E+00	1,32E-02	1,98E+00	2,59E-02	-7,49E-01
GWP_{FOSSIL}	(kg CO ₂ eq.)	2,29E+00	3,46E-01	5,10E-01	0,00E+00	1,31E-02	1,95E+00	2,58E-02	-7,48E-01
GWP_{BIOGENIC}	(kg CO ₂ eq.)	-5,20E-02	2,89E-04	2,90E-02	0,00E+00	1,21E-05	2,97E-02	2,19E-05	-1,21E-03
GWP_{LULUC}	(kg CO ₂ eq.)	7,75E-04	2,14E-03	9,71E-05	0,00E+00	9,23E-05	7,38E-05	4,76E-05	-7,44E-05
ODP	(kg CFC 11 eq.)	1,61E-08	3,27E-14	2,78E-08	0,00E+00	1,34E-15	3,36E-13	6,06E-14	-3,28E-12
AP	(mol H+ eq.)	8,37E-03	2,13E-03	9,62E-04	0,00E+00	4,26E-05	1,06E-03	1,83E-04	-1,38E-03
EP_{FRESHWATER}	(kg P eq.)	8,84E-05	1,14E-06	2,78E-05	0,00E+00	4,89E-08	2,12E-07	4,37E-08	-8,99E-07
EP_{MARINE}	(kg N eq.)	2,81E-03	7,57E-04	2,85E-04	0,00E+00	1,92E-05	4,17E-04	4,67E-05	-3,25E-04
EP_{TERRESTRIAL}	(mol N eq.)	2,29E-02	8,41E-03	3,09E-03	0,00E+00	2,16E-04	4,75E-03	5,14E-04	-3,52E-03
POCP	(kg NMVOC eq.)	6,68E-03	1,72E-03	1,03E-03	0,00E+00	3,81E-05	1,09E-03	1,42E-04	-1,21E-03
ADP_{MINERALS&METALS*}	(kg Sb eq.)	4,34E-06	3,30E-08	1,32E-06	0,00E+00	1,38E-09	1,93E-08	2,64E-09	-1,45E-07
ADP_{FOSSIL*}	(MJ)	1,55E+02	4,50E+00	4,35E+00	0,00E+00	1,80E-01	1,09E+00	3,38E-01	-3,25E+01
WDP*	(m ³ world eq.)	4,62E-01	3,60E-03	3,56E-02	0,00E+00	1,53E-04	2,44E-01	2,83E-03	-5,31E-02

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}**: Global Warming Potential fossil fuels; **GWP_{BIOGENIC}**: Global Warming Potential biogenic; **GWP_{LULUC}**: Global Warming Potential land use and land use change; **ODP**: Depletion Potential of the stratospheric Ozone layer; **AP**: Acidification Potential; **EP_{FRESHWATER}**: Eutrophication Potential, freshwater; **EP_{MARINE}**: Eutrophication Potential, marine; **EP_{TERRESTRIAL}**: Eutrophication Potential, terrestrial; **POCP**: Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS*}**: Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL*}**: Abiotic Depletion Potential for fossil resources; **WDP**: Water Deprivation Potential.

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experienced with the indicator.

Table 19: Polyflex Light P - Potential environmental impact - additional mandatory and voluntary indicators referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	2,15E+00	3,41E-01	5,00E-01	0,00E+00	1,29E-02	1,95E+00	2,54E-02	-7,23E-01

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 20: Polyflex Light P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	6,96E+00	2,90E-01	9,08E-02	0,00E+00	1,25E-02	2,07E-01	5,07E-02	-2,28E+00
PERM	MJ	1,87E+00	0,00E+00						
PERT	MJ	8,83E+00	2,90E-01	9,08E-02	0,00E+00	1,25E-02	2,07E-01	5,07E-02	-2,28E+00
PENRE	MJ	1,56E+02	4,52E+00	4,35E+00	0,00E+00	1,80E-01	1,09E+00	3,38E-01	-3,26E+01
PENRM	MJ	2,82E-01	0,00E+00						
PENRT	MJ	1,56E+02	4,52E+00	4,35E+00	0,00E+00	1,80E-01	1,09E+00	3,38E-01	-3,26E+01

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
SM*	kg	5,93E-01	0,00E+00						
RSF	MJ	0,00E+00							
NRSF	MJ	0,00E+00							
FW	m ³	1,16E-02	3,35E-04	8,34E-04	0,00E+00	1,44E-05	5,78E-03	8,58E-05	-2,24E-03

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

*Referred only to 1 m² of product without packaging.

Table 21: Polyflex Light P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	3,01E-05	2,35E-11	5,98E-12	0,00E+00	9,55E-13	9,06E-11	1,74E-11	-1,33E-09
NHWD	kg	1,15E-01	7,13E-04	1,80E-02	0,00E+00	2,94E-05	2,65E-01	1,73E+00	-6,45E-03
RWD	kg	5,92E-04	8,14E-06	2,71E-06	0,00E+00	3,35E-07	4,26E-05	3,76E-06	-6,54E-04
Components for re-use	kg	0,00E+00							
Materials for recycling	kg	4,35E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,76E-01	0,00E+00	-5,76E-01
Materials for energy recovery	kg	0,00E+00							
Exported energy, electricity	MJ	0,00E+00	0,00E+00	1,46E-01	0,00E+00	0,00E+00	2,16E+00	0,00E+00	-2,30E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	2,75E-01	0,00E+00	0,00E+00	4,05E+00	0,00E+00	-4,32E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed.

Table 22: Polyflex Light P - Information on biogenic carbon content at the factory gate referred to 1 m² of packaged finished product

Indicator	Unit	Quantity
Biogenic carbon content in packaging	kg C	4,22E-02
Biogenic carbon content in product	kg C	0,00E+00

ANTIRADICE LIGHT P (1 m² of product packaged)

Table 23: Antiradice Light P - Potential environmental impact. mandatory indicators according to en 15804 referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP _{TOTAL}	(kg CO ₂ eq.)	1,91E+00	3,47E-01	5,36E-01	0,00E+00	1,31E-02	1,96E+00	2,57E-02	-7,46E-01
GWP _{FOSSIL}	(kg CO ₂ eq.)	1,95E+00	3,44E-01	5,07E-01	0,00E+00	1,30E-02	1,94E+00	2,57E-02	-7,44E-01
GWP _{BIOGENIC}	(kg CO ₂ eq.)	-4,18E-02	2,89E-04	2,90E-02	0,00E+00	1,22E-05	1,86E-02	2,20E-05	-1,22E-03
GWP _{LULUC}	(kg CO ₂ eq.)	6,71E-04	2,13E-03	9,66E-05	0,00E+00	9,18E-05	7,35E-05	4,74E-05	-7,40E-05
ODP	(kg CFC 11 eq.)	1,05E-08	3,26E-14	2,76E-08	0,00E+00	1,34E-15	3,34E-13	6,03E-14	-3,26E-12
AP	(mol H+ eq.)	6,68E-03	2,12E-03	9,57E-04	0,00E+00	4,24E-05	1,06E-03	1,82E-04	-1,37E-03
EP _{FRESHWATER}	(kg P eq.)	5,29E-05	1,13E-06	2,76E-05	0,00E+00	4,87E-08	2,11E-07	4,35E-08	-8,95E-07
EP _{MARINE}	(kg N eq.)	2,10E-03	7,54E-04	2,84E-04	0,00E+00	1,91E-05	4,15E-04	4,65E-05	-3,23E-04
EP _{TERRESTRIAL}	(mol N eq.)	1,83E-02	8,37E-03	3,08E-03	0,00E+00	2,15E-04	4,73E-03	5,11E-04	-3,50E-03
POCP	(kg NMVOC eq.)	5,48E-03	1,71E-03	1,03E-03	0,00E+00	3,79E-05	1,09E-03	1,41E-04	-1,20E-03

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
ADP _{MINERALS&METALS*}	(kg Sb eq.)	2,53E-06	3,28E-08	1,31E-06	0,00E+00	1,37E-09	1,92E-08	2,63E-09	-1,44E-07
ADP _{FOSSIL*}	(MJ)	1,33E+02	4,48E+00	4,33E+00	0,00E+00	1,79E-01	1,09E+00	3,36E-01	-3,24E+01
WDP*	(m ³ world eq.)	3,12E-01	3,58E-03	3,54E-02	0,00E+00	1,52E-04	2,43E-01	2,81E-03	-5,29E-02

GWP_{TOTAL}: Global Warming Potential total; **GWP_{FOSSIL}:** Global Warming Potential fossil fuels; **GWP_{BIOGENIC}:** Global Warming Potential biogenic; **GWP_{LULUC}:** Global Warming Potential land use and land use change; **ODP:** Depletion Potential of the stratospheric Ozone layer; **AP:** Acidification Potential; **EP_{FRESHWATER}:** Eutrophication Potential, freshwater; **EP_{MARINE}:** Eutrophication Potential, marine; **EP_{TERRESTRIAL}:** Eutrophication Potential, terrestrial; **POCP:** Formation potential of tropospheric ozone; **ADP_{MINERALS&METALS}:** Abiotic Depletion Potential for non-fossil resources; **ADP_{FOSSIL}:** Abiotic Depletion Potential for fossil resources; **WDP:** Water Deprivation Potential.

*The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is a limited experienced with the indicator.

Table 24: Antiradice Light P - Potential environmental impact - additional mandatory and voluntary indicators referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG	(kg CO ₂ eq.)	1,83E+00	3,40E-01	4,98E-01	0,00E+00	1,29E-02	1,94E+00	2,53E-02	-7,19E-01

GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Table 25: Antiradice Light P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	6,37E+00	2,88E-01	9,03E-02	0,00E+00	1,24E-02	2,06E-01	5,05E-02	-2,27E+00
PERM	MJ	1,85E+00	0,00E+00						
PERT	MJ	8,22E+00	2,88E-01	9,03E-02	0,00E+00	1,24E-02	2,06E-01	5,05E-02	-2,27E+00
PENRE	MJ	1,33E+02	4,50E+00	4,33E+00	0,00E+00	1,80E-01	1,09E+00	3,37E-01	-3,24E+01
PENRM	MJ	2,80E-01	0,00E+00						
PENRT	MJ	1,34E+02	4,50E+00	4,33E+00	0,00E+00	1,80E-01	1,09E+00	3,37E-01	-3,24E+01
SM*	kg	5,84E-01	0,00E+00						
RSF	MJ	0,00E+00							
NRSF	MJ	0,00E+00							
FW	m ³	8,18E-03	3,34E-04	8,30E-04	0,00E+00	1,43E-05	5,76E-03	8,54E-05	-2,23E-03

PERE: Use of renewable primary energy excluding renewable primary energy resources used as raw materials; **PERM:** Use of renewable primary energy resources used as raw materials; **PERT:** Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials); **PENRE:** Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; **PENRM:** Use of non-renewable primary energy resources used as raw materials; **PENRT:** Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials); **SM:** Use of secondary material; **RSF:** Use of renewable secondary fuels; **NRSF:** Use of non-renewable secondary fuels; **FW:** Net use of fresh water.

*Referred only to 1 m² of product without packaging.

Table 26: Antiradice Light P - Use of resources referred to 1 m² of packaged finished product

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	8,30E-05	2,34E-11	5,95E-12	0,00E+00	9,50E-13	9,02E-11	1,73E-11	-1,33E-09
NHWD	kg	1,20E-01	7,09E-04	1,79E-02	0,00E+00	2,93E-05	2,64E-01	1,72E+00	-6,42E-03
RWD	kg	6,17E-04	8,10E-06	2,70E-06	0,00E+00	3,33E-07	4,24E-05	3,75E-06	-6,51E-04
Components for re-use	kg	0,00E+00							
Materials for recycling	kg	4,33E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,73E-01	0,00E+00	-5,73E-01
Materials for energy recovery	kg	0,00E+00							
Exported energy, electricity	MJ	0,00E+00	0,00E+00	1,46E-01	0,00E+00	0,00E+00	2,15E+00	0,00E+00	-2,29E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	2,73E-01	0,00E+00	0,00E+00	4,03E+00	0,00E+00	-4,30E+00

HWD: Hazardous waste disposed; **NHWD:** Non-Hazardous waste disposed; **RWD:** Radioactive waste disposed.

Table 27: Antiradice Light P - Information on biogenic carbon content at the factory gate referred to 1 m² of packaged finished product

Indicator	Unit	Quantity
Biogenic carbon content in packaging	kg C	4,20E-02
Biogenic carbon content in product	kg C	0,00E+00

Tables above show absolute results for each of environmental impact categories. They clearly indicate that product stage (A1 - A3) has the highest contribution for each of them and accounts for up to 80% of the total impact in the whole system boundary.

In particular, bitumen, polymers and reinforcing materials, which are some of the main components in **Evolight S P**, **Bitulight S P**, **Polyflex Light P** and **Antiradice Light P** formulations, carry a significant impact for all environmental categories.

In terms of GWP, module A5 gives a not negligible contribution especially in the biogenic carbon impact category. This is due to the disposal of the packaging that is the principal responsible of the biogenic carbon content.

Referring to biogenic carbon the negative impacts of raw materials and packaging (A1 and A3) are compensated by the disposal of them in the modules A5 and C3.

Transportation modules, especially A4, have relevant importance in terms of GW_{Pluluc}, while the contribution became less relevant in the other environmental categories.



Figure 4: Reoxthene product application


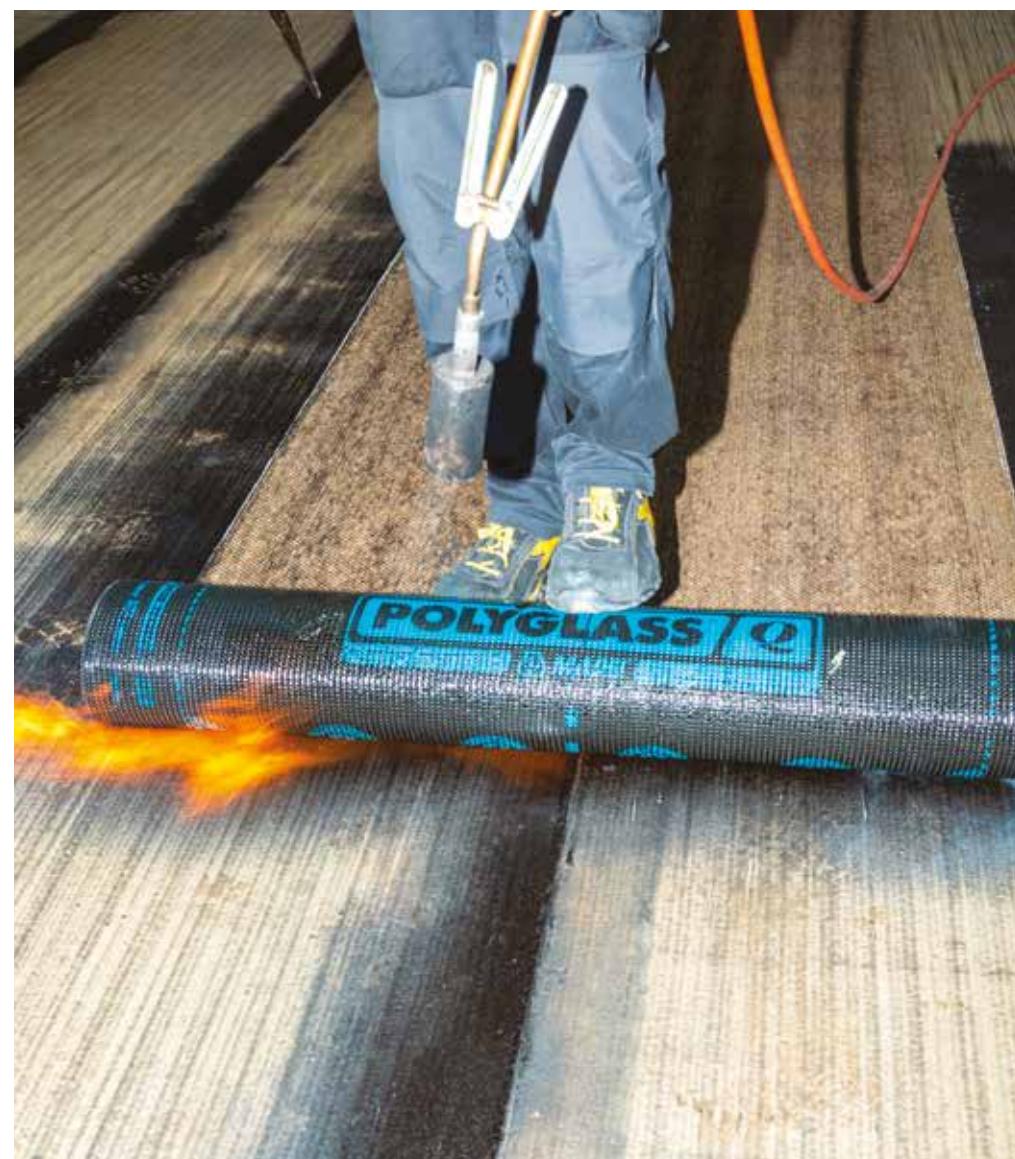


Figure 5: Reoxthene product application

The following table shows the relative contribution for all environmental categories considered in this EPD.

Table 28: Environmental Impact as percentage of Polyflex Light P

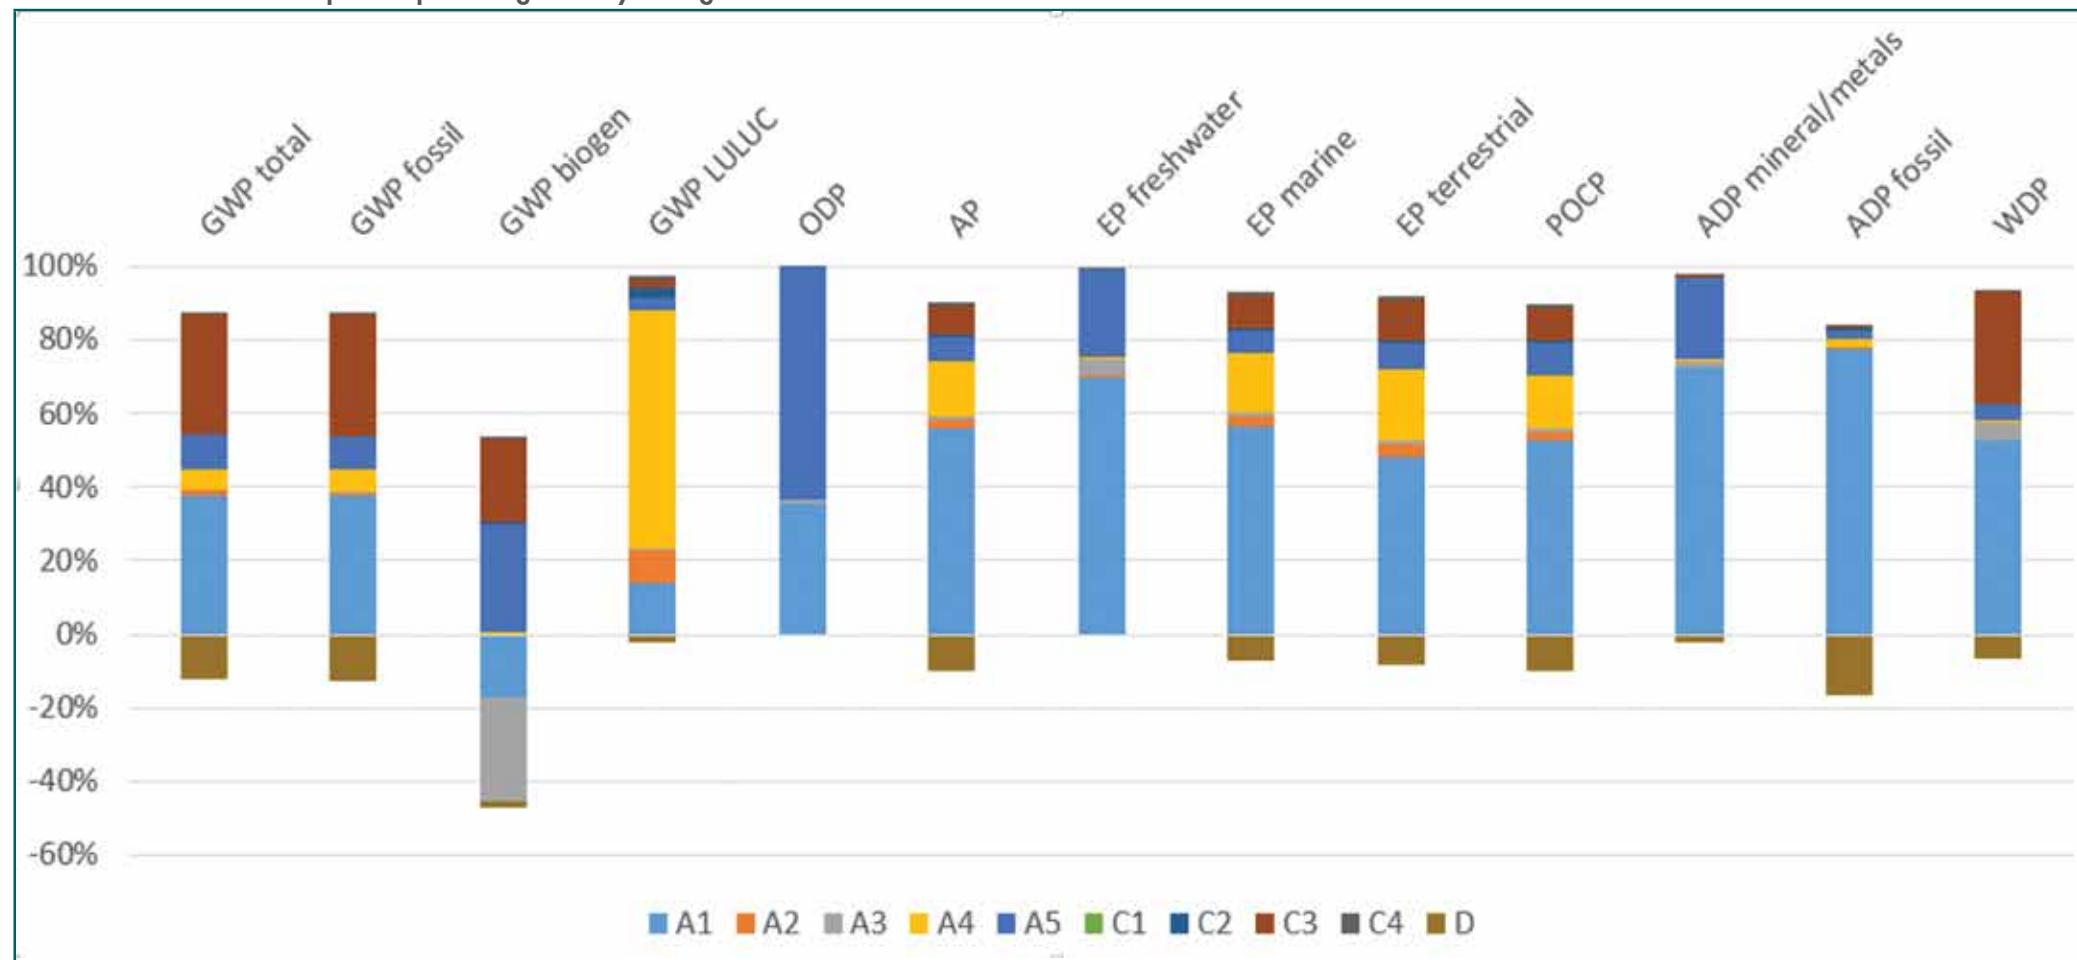

More details about electrical mix used in this EPD is shown below:

Data source	Amount	GWP	Unit
Residual electricity grid mix (IT) - 2021 *CML2001 – Aug. 2016	AIB	0,515*	kg CO ₂ -equiv/kWh

8. DATA QUALITY

Table 29: Data quality

Dataset & Geographical reference	Database (source)	Temporary reference
Bitumen	Sphera Database	2018
Polymers	Sphera Database	2021
Filler	Sphera Database	2021
Reinforcing material	Sphera Database	2021
Other additives	Ecoinvent Database 3.8	2021
Residual electricity grid mix (IT)	AIB; Sphera Database	2021
A2 (Transport)		
Truck transport (27 ton payload - GLO)	Sphera Database	2021
Diesel for transport (EU)	Sphera Database	2018
A3 (Transport)		
Packaging (EU)	Ecoinvent Database 3.8	2021
Diesel mix (EU)	Sphera Database	2018
Wastewater treatment (EU)	Sphera Database	2021
A4 (Transport)		
Truck transport (27ton payload - GLO)	Sphera Database	2021
Diesel for transport (EU)	Sphera Database	2018
Ocean ship (27500 DWT payload - GLO)	Sphera Database	2021
Heavy fuel oil for ship transport (EU)	Sphera Database	2018
A5 (Installation)		
Propane, burned in building machine (GLO)	Sphera Database	2021
Commercial waste in municipal waste incineration plant (EU)	Sphera Database	2021
C1-C4 (End of Life)		
Truck transport (9,3 ton payload - GLO)	Sphera Database	2021
Diesel for transport (EU)	Sphera Database	2018
Construction waste dumping (EU)	Sphera Database	2021
Commercial waste in municipal waste incineration plant (EU)	Sphera Database	2021
Construction waste treatment (EU)	Sphera Database	2021

All data included in table above refer to a period between 2018 and 2021; the most relevant ones are specific from supplier, while the others (i.e. transport and minor contribution dataset), come from European and global databases.

All datasets are not more than 10 years old according to EN 15804 §6.3.8.2 "Data quality requirements".

Primary data concern the year 2021 and represent the whole annual production.

The Quality level concerning datasets used in the EPD can be considered as "very good" or "good" according to Annex E of the EN 15804 (current version).

9. REQUISITE EVIDENCE

9.1 Recycled content

Products	Recycled material content (Pre-Consumer)
Evolight S P	15%
Bitulight P	15%
Polyflex Light	15%
Antiradice Light P	15%

9.2 Disassembly

The finished product is potentially suitable for disassembly through selective demolition.

9.3 Biogenic Carbon content

Biogenic carbon content at the factory gate referred to 1 kg of product with packaging is 0,00E+00

10. VERIFICATION AND REGISTRATION

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

CEN standard EN15804 served as the Core Product Category Rules (PCR)

PCR:

PCR review was conducted by:

PCR 2019:14 Construction products (EN 15804:A2), Version 1.11, 2021-02-05, UN CPC code 54

The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members.

Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact.

EPD Process Certification

EPD Verification

Certiquality S.r.l.

Number of accreditations: 003H rev15

Third party verifier:

Accredia

YES

NO

Accredited or approved by:

Procedure for follow-up of data during EPD validity involves third-party verifier

11. REFERENCES

- EN 13707: FLEXIBLE SHEETS FOR WATERPROOFING - REINFORCED BITUMEN SHEETS FOR ROOF WATERPROOFING - DEFINITIONS AND CHARACTERISTICS
- EN 15804: SUSTAINABILITY OF CONSTRUCTION WORKS - ENVIRONMENTAL PRODUCT DECLARATIONS - CORE RULES FOR THE PRODUCT CATEGORY OF CONSTRUCTION PRODUCTS
- EUROPEAN DIRECTIVE 2008/98/EC
- EUROPEAN RESIDUAL MIXES VERSION 1.0, 2022-05-31 (AIB: ASSOCIATION OF ISSUING BODIES)
- EWA (EUROPEAN WATERPROOFING ASSOCIATION): SECTOR EPD SP-00414
- GENERAL PROGRAMME INSTRUCTIONS OF THE INTERNATIONAL EPD® SYSTEM. VERSION 3.01
- ISO 14025 ENVIRONMENTAL LABELS AND DECLARATIONS - TYPE III ENVIRONMENTAL DECLARATIONS - PRINCIPLES AND PROCEDURES
- ISO 14044 ENVIRONMENTAL MANAGEMENT – LIFE CYCLE ASSESSMENT – REQUIREMENTS AND GUIDELINES
- PCR 2019:14 CONSTRUCTION PRODUCTS (EN 15804: A2), UN CPC CODE 54; VERSION 1.11

Contact information



EPD owner:

Polyglass SpA
www.polyglass.com



LCA author:

Mapei SpA
www.mapei.it;
Environmental Sustainability Office



The International EPD® System
Address: EPD International AB

Programme operator:

Box 210 60
SE-100 31 Stockholm
Sweden

Website: www.environdec.com
E-mail: info@environdec.com



POLYGLASS SPA

Via Giorgio Squinzi, 2
31047 Ponte di Piave (TV) - Italy

+39 04227547

+39 0422854118

info@polyglass.it